


# Polo Pendant

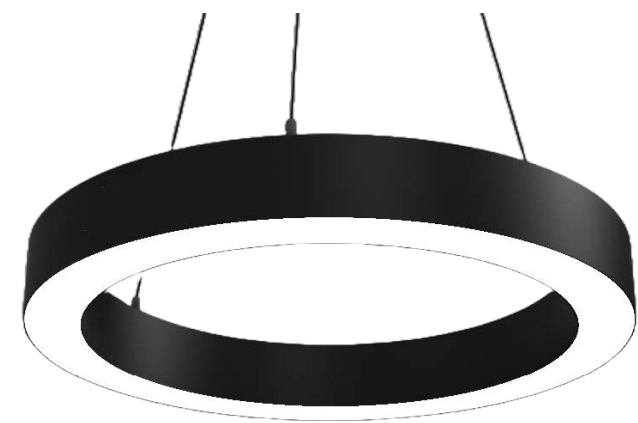

## To Specify:

Select Part Number with additional options if required  
e.g **POLO/12/3204/84/DIM**

= Polo, ø1200, 3204lm, 26W, 4000K, DALI Dimmable

| Part No.        | W  | lm   | lm/W | D(mm) |
|-----------------|----|------|------|-------|
| POLO/6/1456/84  | 12 | 1456 | 122  | ø600  |
| POLO/6/2886/84  | 24 | 2886 | 119  | ø600  |
| POLO/6/4290/84  | 37 | 4290 | 116  | ø600  |
| POLO/12/3204/84 | 26 | 3204 | 123  | ø1200 |
| POLO/12/6350/84 | 52 | 6350 | 120  | ø1200 |
| POLO/12/9438/84 | 80 | 9438 | 117  | ø1200 |

## Options

For DALI Dimmable suffix

/DIM

- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 123lm/W
- Nominal life-time of 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 90
- Custom sizes are also available on request

